


EXPERT 36BK – 361 g/m² Black film

Expert 36BK is a 361gsm 2-side black matt aqueous coated polyester film, optimised for Production & Digital Press print applications.

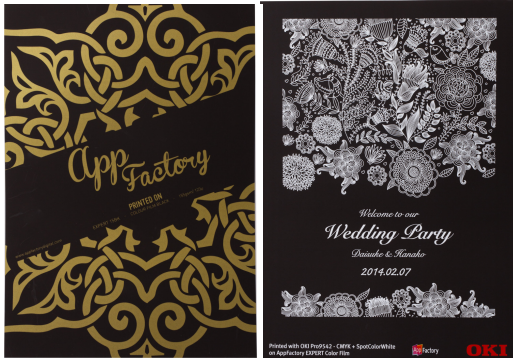

Physical characteristics

Property	Typical Value	Unit	Test Method
Weight	361 +/- 7	gsm	Internal Method
Total Thickness	276 +/- 6	μ	Electronic Micrometer
Opacity	>99	%	TAPPI T519
Gloss 60°	<4	%	BYK Gardner
Shrinkage	MD 1.0 TD 0.3	%	DIN 40634 15 minutes @ 150° C
Tensile Strength	MD 16 TD 20	KgF/mm2	ASTM D882-83
Elongation at break	MD 210 TD 145	%	ASTM D882-83
Melting Point	250	° C	ASTM E794-85
Usage Temperature	-40 to +120	° C	Internal method

Availability

Sheets/Pack

A4	100
A3	100
SRA3	100

Recommended conditions

For use	10° C – 30° C, 40% - 55% RH
For storage	10° C – 20° C, 20% - 55% RH
Shelf life	24 months after delivery (under recommended storage conditions)

Compatibility

Suitable for most thermal transfer and dry toner (laser/LED/flash fusion) print processes, both mono and colour small-volume, mid-volume & production machines. On such machines the user must establish for themselves the optimum settings and paper path, being aware of the thickness and weight of the material. The printable surface is also suitable for screen print, offset litho (using only fully oxidising inks).

Applications and characteristics

It has a smooth matt vivid black surface giving a strong dense image with excellent print adhesion and can be printed on both sides where equipment allows.

- ✓ Water resistant, wipeable and punchable.
- ✓ Excellent for file dividers and ideal for signage & high impact point of sale displays. Ideal for high impact point of sale and promotional displays with white and metallic toners
- ✓ Can also be used to create instruction manuals or documents for use in harsh environments and replaces the need for paper to be printed and then encapsulated.

NOTICE: The information provided herein is correct to the best of our knowledge. No liability for any errors, facts or opinions is accepted. You must satisfy yourself as to the suitability of this product for your application. No responsibility for any loss as a result of any person placing reliance on any material contained herein can be accepted.